

ARMADI REFRIGERATI

REFRIGERATED CABINETS

Smart
Link
Wifi



GN 400 G TN

Armadio frigo statico con agitatore, porta vetro. Temperatura positiva.

Static-fan assisted cabinet, glass door. Positive temperature.



Colori disponibili / Available colors



GN 400 G BT

Armadio freezer statico, porta vetro. Bassa temperatura.

Static freezer, glass door. Negative temperature.



Colori disponibili / Available colors



Catering




Maniglia integrata
Built-in handle



Termostato elettronico
Electronic thermostat



Porta vetro senza cornice
Full glass frameless door

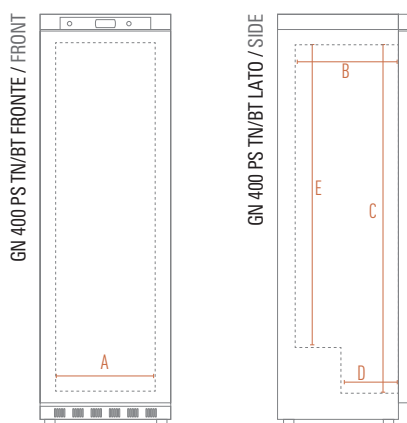

Dimensioni mm / Dimensions mm	GN 400 G TN - GN 400 G TN BLK	GN 400 G BT - GN 400 G BT BLK
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	600 x 625 x 1860	600 x 625 x 1860
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	660 x 725 x 2000	660 x 725 x 2000
A - Larghezza / Width	457	457
B - Profondità / Depth	474	474
C - Altezza / Height	1600	1600
D - Profondità Min. / Min. Depth	264	264
E - Altezza Min. / Min. Height	1390	1390
Adesivo Laterale / Side Sticker	525 x 1850	525 x 1850
Adesivo Vetro / Glass Sticker	408 x 1477	408 x 1477

Caratteristiche Tecniche / Technical Features	GN 400 G TN - GN 400 G TN BLK	GN 400 G BT - GN 400 G BT BLK
Temperatura / Temperature Range	+2 °C / +10 °C	-22 °C / -15 °C
Classe Climatica / Climate Class	4	4
Capacità / Capacity	Lt. 400	Lt. 400
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	ABS	ABS
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 45,9	dB 38,4
Smart Link WiFi Controllo remoto / Remote controller	Optional	Optional
Spessore isolamento / Insulation thickness	mm 70	mm 70
Sbrinamento / Defrost	Automatico / Automatic	Manuale / Manual
Illuminazione / Lighting	2 Led Verticali / 2 vertical led	2 Led Verticali / 2 vertical led
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes
Chiave e serratura / Lock and key	Si / Yes	Si / Yes
Reversibilità porta / Reversible door	-	-
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 652 x 542 + N° 1 - mm 652 x 347	N° 6 - mm 468 x 405
Ruote-Piedi / Castors-Feet	4 Piedi / 4 Feet	4 Piedi / 4 Feet
Porta / Door	Vetro temperato / Tempered Glass	Vetro temperato / Tempered Glass
Peso Netto-Lordo / Net-Gross Weight	Kg 75 / 88	Kg 86 / 99
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R290
Assorbimento / Absorption	W 235	W 330
Consumo Energia / Energy Consumption	Kwh/24H 2,02	Kwh/24H 6,08