

# POZZETTI FRIGO/FREEZER DUAL CHEST COOLER/FREEZER



Pastry & Frozen



## FRC 500 PFF

Frigo/Congelatore statico a pozzo vetro piatto scorrevole.  
Static chest cooler/freezer with flat sliding glass lids.




## FRC 600 PFF

Frigo/Congelatore statico a pozzo vetro piatto scorrevole.  
Static chest cooler/freezer with flat sliding glass lids.






Ruote  
Castors

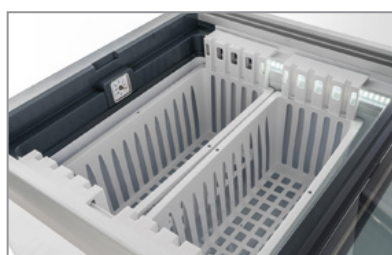

Cestelli  
Baskets



Termometro analogico  
Analogue thermometer

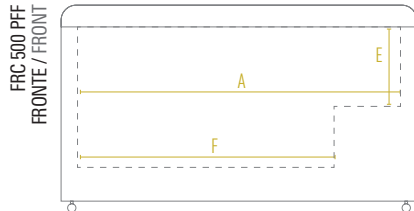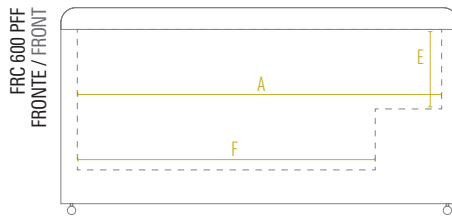

Dimensioni mm / Dimensions mm	FRC 500 PFF	FRC 600 PFF
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1634 x 653 x 900	1824 x 720 x 900
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1680 x 720 x 980	1860 x 720 x 980
A - Larghezza / Width	1483	1673
B - Profondità / Depth	505	505
C - Altezza / Height	645	645
E - Altezza Minima / Min. Height	365	365
F - Larghezza Minima / Min. Width	1178	1368
Adesivo Laterale Sinistro / Side Left Sticker	660 x 722	660 x 722
Adesivo Frontale / Front Sticker	1660 x 712	1850 x 712

Caratteristiche Tecniche / Technical Features	FRC 500 PFF	FRC 600 PFF
Temperatura / Temperature Range	0 °C / +10 °C -18 °C / 0 °C	0 °C / +10 °C -18 °C / 0 °C
Classe Climatica / Climate Class	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 439 / 516	Lt. 501 / 586
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio preverniciato Precoated aluminium	Alluminio preverniciato Precoated aluminium
Cestelli / Baskets	560 x 280 x 208 mm Standard 3pz / 3pcs Optional (max 7pz / max 7pcs)	560 x 280 x 208 mm Standard 3pz / 3pcs Optional (max 8pz / max 8pcs)
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical
Rumorosità / Noise level	dB 57	dB 57
Spessore isolamento / Insulation thickness	mm 70	mm 70
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual
Illuminazione / Lighting	Led 5,5 W	Led 5 W
Chiave e serratura / Lock and key	Si / Yes	Si / Yes
Ruote-Piedi / Castors-Feet	6 Ruote (2 con freni) 6 Castors (2 with brakes)	6 Ruote (2 con freni) 6 Castors (2 with brakes)
Peso Netto-Lordo / Net-Gross Weight	Kg 64 / 82	Kg 72 / 90
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 280	W 320
Consumo Energia / Energy Consumption	Kwh/24H 4,064	Kwh/24H 4,007