

# ARMADI REFRIGERATI

## REFRIGERATED CABINETS

Smart  
Link  
Wifi




### GN 200 PS TN

Armadio frigo statico con agitatore.  
Temperatura positiva.  
Static-fan assisted cabinet.  
Positive temperature.



### GN 200 G TN

Armadio frigo statico con agitatore, porta  
vetro. Temperatura positiva.  
Static-fan assisted cabinet, glass door.  
Positive temperature.



### GN 200 PS BT

Armadio freezer statico.  
Bassa temperatura.  
Static freezer.  
Negative temperature.




Maniglia integrata  
Built-in handle



Illuminazione LED  
LED lighting



Mensole rinforzate  
Reinforced shelves

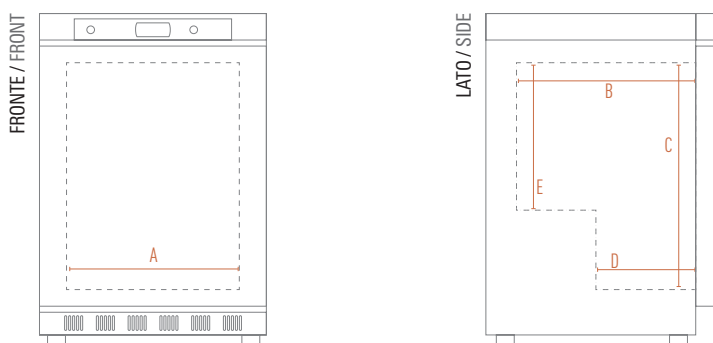

Dimensioni mm / Dimensions mm	GN 200 PS TN	GN 200 G TN	GN 200 PS BT
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	600 x 625 x 850	600 x 625 x 850	600 x 625 x 850
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	660 x 725 x 1000	660 x 725 x 1000	660 x 725 x 1000
A - Larghezza / Width	457	457	457
B - Profondità / Depth	474	474	474
C - Altezza / Height	600	600	600
D - Profondità Min. / Min. Depth	264	264	264
E - Altezza Min. / Min. Height	390	390	390

Caratteristiche Tecniche / Technical Features	GN 200 PS TN	GN 200 G TN	GN 200 PS BT
Temperatura / Temperature Range	0 °C / +10 °C	+2 °C / +10 °C	-22 °C / -15 °C
Classe Climatica / Climate Class	4	4	4
Capacità / Capacity	Lt. 200	Lt. 200	Lt. 200
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	ABS	ABS	ABS
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 43,8	dB 38,6	dB 46
Smart Link WiFi   Controllo remoto / Remote controller	Optional	Optional	Optional
Spessore isolamento / Insulation thickness	mm 70	mm 70	mm 70
Sbrinatorio / Defrost	Automatico / Automatic	Automatico / Automatic	Manuale / Manual
Illuminazione / Lighting	1 Led orizzontale 1 horizontal led	2 Led verticali / 2 Vertical led	1 Led orizzontale 1 horizontal led
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Reversibilità porta / Reversible door	Si / Yes	-	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 2 - mm 476 x 436 + N° 1 - mm 477 x 207	N° 2 - mm 476 x 436 + N° 1 - mm 477 x 207	N° 1 - mm 476 x 436
Ruote-Piedi / Castors-Feet	4 Piedi / 4 Feet	4 Piedi / 4 Feet	4 Piedi / 4 Feet
Porta / Door	ABS	ABS	Vetro / Glass
Peso Netto-Lordo / Net-Gross Weight	Kg 40 / 43	Kg 41 / 45	Kg 36 / 39
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A	R600A
Assorbimento / Absorption	W 125	W 157	W 130
Consumo Energia / Energy Consumption	KwH/24H 1,25	KwH/24H 1,96	KwH/24H 2,12