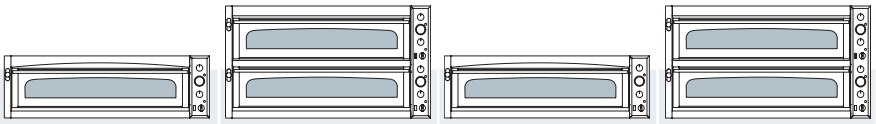

| MECHANICAL MECCANICO | | | SUPERIOR XL 6L GLASS | SUPERIOR XL 66L GLASS | SUPERIOR XL 9 GLASS | SUPERIOR XL 99 GLASS |
|---|---|---|---|---|---|---|
| **CHAMBERS** CAMERE | | n° | 1 | 2 | 1 | 2 |
| **PIZZE** PIZZE n° | Ø35 | n° | | | | |
| **WORKING TEMPERATURE** TEMPERATURA D'ESERCIZIO | | °C | 50 - 450 | 50 - 450 | 50 - 450 | 50 - 450 |
| **POWER** \| POTENZA | | kW | 9,0 | 18,0 | 13,2 | 26,4 |
| **TOP** | | W | 1500x3 | 1500x6 | 2200x3 | 2200x6 |
| **BOTTOM** | | W | 1500x3 | 1500x6 | 2200x3 | 2200x6 |
| **POWER SUPPLY** ALIMENTAZIONE | | volt | 230 - 400 | 230 - 400 | 230 - 400 | 230 - 400 |
| **ELECTRICAL ABSORPTION SINGLE PHASE** ASSORBIMENTO MONOFASE | | Amp x phase | 39,1 | 78,3 | 57,4 | 114,8 |
| **ELECTRICAL ABSORPTION THREE PHASE** ASSORBIMENTO TRIFASE | | Amp x phase | 13,0 | 26,1 | 19,1 | 38,3 |
| **INTERNAL DIMENSIONS** DIMENSIONI INTERNE | W<br>D<br>H | cm | **108,0**<br>**72,0**<br>**14,0** | **108,0**<br>**72,0**<br>**14,0** | **108,0**<br>**108,0**<br>**14,0** | **108,0**<br>**108,0**<br>**14,0** |
| **EXTERNAL DIMENSIONS** DIMENSIONI ESTERNE | W<br>D<br>H | cm | 136,0<br>94,0<br>41,5 | 136,0<br>94,0<br>74,5 | 136,0<br>130,0<br>41,5 | 136,0<br>130,0<br>74,5 |
| **PACKING DIMENSIONS** DIMENSIONI IMBALLO | W<br>D<br>H | cm | 144,0<br>106,0<br>57,0 | 144,0<br>106,0<br>90,0 | 142,0<br>144,0<br>57,0 | 142,0<br>144,0<br>90,0 |
| **NET WEIGHT** \| PESO NETTO | | kg | 119,8 | 218,0 | 170,0 | 280,0 |
| **GROSS WEIGHT** \| PESO LORDO | | kg | 138,0 | 239,0 | 190,0 | 311,0 |
| **DIGITAL VERSION** VERSIONE DIGITALE | | | o | o | o | o |
| **12V TRANSFORMER AND LAMP HOLDER** TRASFORMATORE 12V E PORTALAMPADA | | | o | o | o | o |
| **INTERNAL LIGHT** LUCE INTERNA | | | • | • | • | • |
| **REFRACTORY STONE HOB** PIANO DI COTTURA IN PIETRA REFRATTARIA | | | • | • | • | • |
| **OPTIONAL REFRACTORY STONE** PIETRA REFRATTARIA OPZIONALE | | | o | o | o | o |

• **As standard** | Di serie  o **Optional** | Optional