

SOPRA BANCO PASTICCERIA

COUNTERTOP DISPLAY COOLER



Pastry & Frozen




DLX 70

Vetrina sopra banco snack-pasticceria ventilata, porte scorrevoli
Ventilated snack-pastry countertop display cooler with sliding doors



DLX 90

Vetrina sopra banco snack-pasticceria ventilata, porte scorrevoli
Ventilated snack-pastry countertop display cooler with sliding doors

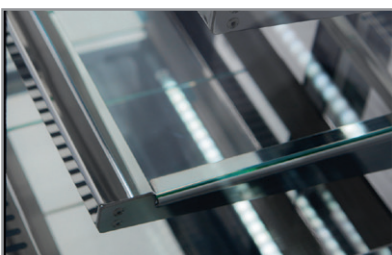



Ripiani: vetro temperato, frontale acciaio
Shelves: tempered glass, stainless steel front



Porta scorrevole
Sliding door



Termostato elettronico
Electronic thermostat



DISTANZA RIPIANI
SHELVES DISTANCE

| Dimensioni mm / Dimensions mm | DLX 70 | DLX 90 |
|---|-----------------|-----------------|
| Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH) | 700 x 560 x 730 | 900 x 560 x 730 |
| Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH) | 785 x 645 x 850 | 985 x 645 x 850 |
| A - Larghezza / Width | 670 | 870 |
| B - Profondità / Depth | 460 | 460 |
| C - Altezza / Height | 410 | 410 |

| Caratteristiche Tecniche / Technical Features | DLX 70 | DLX 90 |
|---|--|--|
| Temperatura / Temperature Range | 0 °C / +18 °C | 0 °C / +18 °C |
| Classe Climatica / Climate Class | 4 | 4 |
| Volume Netto-Lordo / Net-Gross Volume | Lt. 120 / 130 | Lt.160 / 175 |
| Superficie Esterna / Body | Acciaio AISI 304 / Stainless steel AISI 304 | Acciaio AISI 304 / Stainless steel AISI 304 |
| Superficie Interna / Inner Liner | Acciaio AISI 304 / Stainless steel AISI 304 | Acciaio AISI 304 / Stainless steel AISI 304 |
| Termostato / Thermostat | Elettronico / Electronic | Elettronico / Electronic |
| Smart Link WiFi Controllo remoto / Remote controller | Optional | Optional |
| Rumorosità / Noise level | dB 53 | dB 56 |
| Spessore isolamento / Insulation thickness | mm 45 | mm 45 |
| Sbrinatorio / Defrost | Automatico a fermo compressore Automatic compressor cycle | Automatico a fermo compressore Automatic compressor cycle |
| Illuminazione / Lighting | 1 Led orizzontale / Horizontal | 1 Led orizzontale / Horizontal |
| Mensole in vetro temperato (LxP) / Tempered glass shelves (WxD) | N°1 mm 580 x 228 N°1 mm 580 x 278 | N°1 mm 780 x 228 N°1 mm 780 x 278 |
| Ruote-Piedi / Castors-Feet | 4 Piedi / 4 Feet | 4 Piedi / 4 Feet |
| Peso Netto-Lordo / Net-Gross Weight | Kg 70 / 93 | Kg 80 / 103 |
| Voltaggio / Voltage | V 220-240 | V 220-240 |
| Frequenza / Frequency | Hz 50 | Hz 50 |
| Refrigerante / Refrigerant | R600A | R600A |
| Assorbimento / Absorption | W 185 | W 200 |
| Consumo Energia / Energy Consumption | Kwh/24H 3,05 | Kwh/24H 3,72 |