
Specify methane gas or LPG (butane oR propane)
Specificare tipo di gas: metano o GPL (butano o propano)
An der Bestellung muß man entweder Methan oder Flüssiggas (Butan oder Propan) genau angeben
Spécifier le type de gaz: méthane ou Gaz de Pétrole Liquéfié (butane or propane)
Especifique el tipo de gas: metano o GLP (butano o propano)
При заказе указать тип газа: метан или сжиженный нефтяной газ (бутан или пропан



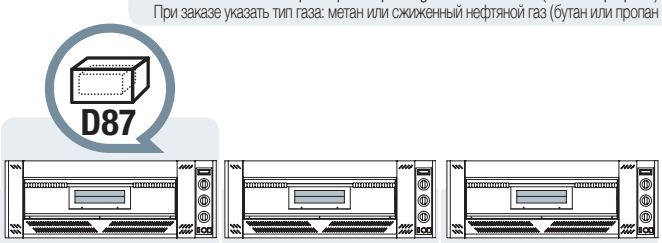

		GAS XL 3L	GAS XL 6L	GAS XL 9
MECHANICAL MECCANICO	Ø35			
CHAMBERS CAMERE	n°	1	1	1
PIZZE PIZZE n°	n°			
WORKING TEMPERATURE TEMPERATURA D'ESERCIZIO	°C	0 - 450	0 - 450	0 - 450
POWER I POTENZA	kW	16,0	23,0	31,0
	BTU/hr	55000	78000	106000
	kcal/h	13800	19800	26700
POWER SUPPLY ALIMENTAZIONE	volt	230	230	230
GAS CONSUMPTION CONSUMO GAS	kg/h	1,209 (G 30/31)	1,933 (G 30/31)	2,532 (G 30/31)
	m³/h	1,659 (G 20)	2,725 (G 20)	3,255 (G 20)
	m³/h	1,780 (G 25)	3,149 (G 25)	4,136 (G 25)
INTERNAL DIMENSIONS DIMENSIONI INTERNE	W D H cm	**108,0** **41,0** **15,0**	**108,0** **72,0** **15,0**	**108,0** **108,0** **15,0**
EXTERNAL DIMENSIONS (with chimney) DIMENSIONI ESTERNE (con camino)	W D H cm	147,0 87,0 54,0	147,0 118,0 54,0	147,0 154,0 54,0
PACKING DIMENSIONS DIMENSIONI IMBALLO	W D H cm	152,0 77,0 60,0	154,0 115,0 60,0	159,0 143,0 60,0
NET WEIGHT I PESO NETTO	kg	89,0	150,0	184,0
GROSS WEIGHT I PESO LORDO	kg	100,0	165,0	206,0
12V TRANSFORMER AND LAMP HOLDER TRASFORMATORE 12V E PORTALAMPADA		o	o	o
INTERNAL LIGHT LUCE INTERNA		o	o	o
REFRACTORY STONE HOB PIANO DI COTTURA IN PIETRA REFRATTARIA		•	•	•
WINDPROOF CHIMNEY CAMINO ANTIVENTO		o	o	o
CHIMNEY CONNECTION FOR STACKABLE OVENS RACCORDO PER FORNI A GAS DA SOVRAPPORRE		o	o	o

• **As standard** I Di serie o **Optional** I Optional